



## Lexmark XC4342

Colour and performance



# Lexmark XC4342

The Lexmark XC4342 is designed for performance, security, and ease of use for mid-to-large workgroups at speeds up to 40 pages per minute\*. Single-pass two-sided scanning and a 17.8 cm tablet-like touchscreen make handling your tasks easy. Replacement cartridges with Unison™ Toner yield up to 25,000/14,200 black/colour pages\*\* to keep you going.

## Robust, enduring quality

- ▶ Enjoy high-quality colour output in a wide variety of environments - from back-office to retail to harsh manufacturing conditions.
- ▶ Intentionally engineered to last seven years or more with durable steel frames and long-life components.
- ▶ Unison™ Toner replacement cartridges yield up to 25,000/14,200 black/colour pages\*\*.

## Make a statement with professional colour

Enjoy the benefits of vibrant, professional-quality output allowing you to do more colour printing in-house - saves time and money. Match corporate colours on marketing collateral and brand-sensitive text and graphics with PANTONE® calibration and Lexmark Named Colour Replacement.



## Always easy. Always intuitive.

- ▶ Large, tablet-like, button-free touchscreens help you intuitively complete every task, from the basic to the complex.
- ▶ Get into the flow with standard access to built-in MFP workflow solutions like Scan Centre, an easy-to-use app

that simplifies routing to multiple destinations simultaneously.

- ▶ An Intelligent Storage Drive (ISD) is standard on this model, providing faster startup, faster data retrieval and more reliability.
- ▶ Plus, you can add other Lexmark or third-party partner solutions that meet your specific business needs.

## Secure by design

Lexmark security features help keep your information safe - in the document, on the device, over the network and at all points in between. Our comprehensive approach to product security is a design and engineering mandate across our entire product portfolio.

## Sustainability matters

- ▶ Designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The award-winning Lexmark Cartridge Collection Programme (LCCP) and Lexmark Equipment Collection Programme (LECP) minimise waste and support recycling (availability varies by country).

## Power up with IoT

- ▶ Sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimise performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

\* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Average yield based on approximately 5% print coverage. Yield stated on cartridge labels, packaging, and printer device menu pages may be substantially lower than final ISO tested yield. For Lexmark's official statement of yield, see ISO yield reports at [https://www.lexmark.com/en\\_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html](https://www.lexmark.com/en_us/products/supplies-and-accessories/iso-page-yields/color-laser-reports.html). Update firmware on your device to ensure accuracy of displayed yield. In demonstration of circular economy principles, genuine Lexmark supplies with Unison™ Toner may contain components recovered from the Lexmark Cartridge Collection Programme (LCCP).

\*\*\* IPDS License and Bar Code License require an Intelligent Storage Drive.

# Lexmark XC4342

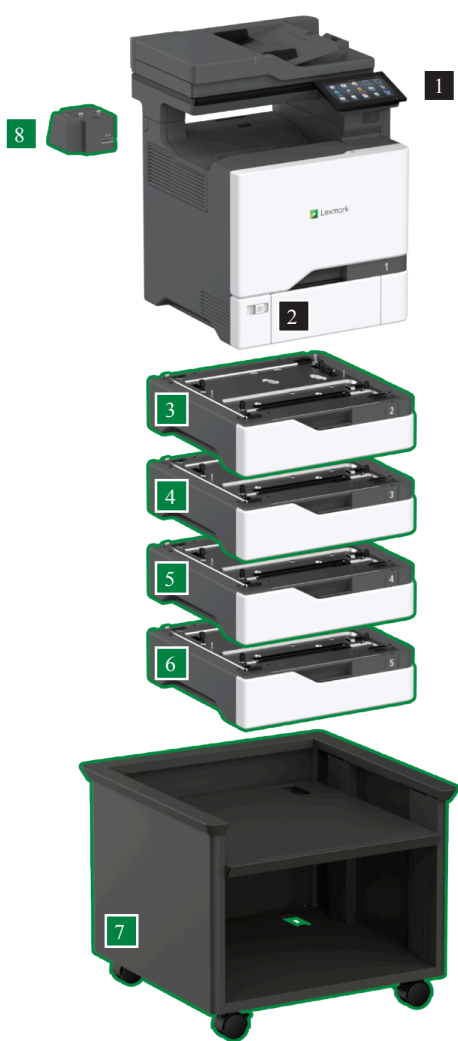

- 1

**Multifunction product with 17.8 cm touch screen**  
621 x 479 x 533 mm
- 2

**550-Sheet tray with 100-sheet multipurpose feeder**  
Dimensions included as part of base model
- 3

**550-Sheet Tray**  
119 x 463 x 483 mm
- 4

**550-Sheet Tray**  
119 x 463 x 483 mm
- 5

**550-Sheet Tray**  
119 x 463 x 483 mm

- 6

**550-Sheet Tray**  
119 x 463 x 483 mm
- 7

**Adjustable Stand**  
521 x 653 x 625 mm
- 8

**Convenience Stapler HV**  
82 x 109 x 121 mm

- Standard
- Optional

<b>P/N</b> 47C9867	<b>Hardware</b> Lexmark XC4342
<b>P/N</b> 24B7515	<b>Supplies</b> Lexmark XC4342, XC4352 Cyan 14.2K Toner Cartridge
24B7516	Lexmark XC4342, 4352 Magenta 14.2K Toner Cartridge
24B7517	Lexmark XC4342, 4352 Yellow 14.2K Toner Cartridge
24B7518	Lexmark XC4342, XC4352 Black 25K Toner Cartridge
71C0W00	Lexmark CS/CX730, 735, C/XC4342, C4352 170K Waste Container
71C0Z10	Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Black 150K Imaging Unit
71C0Z50	Lexmark CS/CX730, 735, C/XC4342, C/XC4352 Colour (CMY) 150K Imaging Unit
<b>P/N</b> 40C2100 47C4597	<b>Paper Handling</b> 550-Sheet Tray Convenience Stapler
<b>P/N</b> 27X0400 57X0070 57X9528	<b>Memory Options</b> 500+ GB Hard Disk Removable Hard Disk Enclosure Kit Intelligent Storage Drive (ISD)
<b>P/N</b> 57X0300 57X0301 82S1203 82S1204	<b>Application Solutions</b> Contact Authentication Device Contactless Authentication Device (Secondary Alternative) IPDS License Bar Code License
<b>P/N</b> 1021294 27X0823 27X6410 37X6350 SPD0002	<b>Connectivity</b> USB (2 Metre) Cable MarkNet N8370 Wireless for CS720, CS725, CX725 Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server Analog Fax Card Surge Protective Device, 220-240V
<b>P/N</b> 40C2300	<b>Furniture</b> Adjustable Stand

Supports up to four optional 550-sheet trays.  
All measurements are shown as height x width x depth. For more information about supported configurations, refer to the Printer, Option and Stand Compatibility Guide at [http://www.lexmark.com/publications/furniture\\_safety/](http://www.lexmark.com/publications/furniture_safety/)  
IPDS License and Bar Code License require an Intelligent Storage Drive.

Product Specifications		Lexmark XC4342
Printing		
Display	Lexmark e-Task 17.8 cm colour touch screen with audible feedback	
Print Speed	Up to: Black: 40 ppm <sup>1</sup> (A4) / Colour: 40 ppm <sup>1</sup> (A4)	
Time to First Page	as fast as: Black: 6.4 seconds / Colour: 7.0 seconds	
Print Resolution	Black: 1200 x 1200 dpi, 4800 Colour Quality (2400 x 600 dpi) / Colour: 4800 CQ (2400 x 600 dpi), 1200 x 1200 dpi	
Memory	Standard: 2048 MB / Maximum: 2048 MB	
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk (optional)	
Recommended Monthly Page Volume	1500 - 15000 pages <sup>2</sup>	
Maximum Monthly Duty Cycle	Up to: 120000 pages per month <sup>3</sup>	
Copying		
Copy Speed	Up to: Black: 39.5 cpm <sup>1</sup> (A4) / Colour: 39.5 cpm <sup>1</sup> (A4)	
Time to First Copy	as fast as: Black: 6.7 seconds / Colour: 7.3 seconds	
Scanning		
Scanner Type / ADF Scan	Flatbed scanner with ADF / DADF (single pass Duplex)	
A4/Ltr Duplex Scan Speed / Duplex Scan Speed (A4/Ltr	Up to: Black: 80 / 84 sides per minute / Colour: 80 / 84 sides per minute	
A4/Ltr Simplex Scan Speed / Scan Speed (A4/Ltr	Up to: Black: 40 / 42 sides per minute / Colour: 40 / 42 sides per minute	
ADF Paper Input Capacity	Up to: 100 pages 75 gsm bond	
Supplies <sup>4</sup>		
Laser Cartridge Yields	up to: 14,200 <sup>5</sup> -page Colour (CMY) High Yield Cartridges / up to: 25,000 <sup>5</sup> -page Black Extra High Yield Cartridge	
Imaging Unit Estimated Yield	Up to: 150000 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage <sup>6</sup>	
Cartridge(s) Shipping with Product	5,000 <sup>5</sup> -page (CMYK) Return Program Toner Cartridges <sup>5</sup>	
Paper Handling		
Included Paper Handling	100-Sheet Multipurpose Feeder, Integrated Duplex, 300-Sheet Output Bin, 550-Sheet Input	
Optional Paper Handling	550-Sheet Tray	
Paper Input Capacity	Up to: Standard: 650 pages 75 gsm bond / Maximum: 2850 pages 75 gsm bond	
Paper Output Capacity	Up to: Standard: 300 pages 75 gsm bond / Maximum: 300 pages 75 gsm bond	
Media Types Supported	Vinyl Labels, Banner Paper, Paper Labels, Card Stock, Plain Paper, Envelopes, Refer to the Paper & Specialty Media Guide	
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope	
General Information <sup>7</sup>		
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear Hi-Speed USB port Compatible with USB 2.0 Specification (Type A), USB 2.0 Specification Hi-Speed Certified (Type B), One Internal Card Slot	
Optional Network Ports	Internal MarkNet N8370 802.11b/g/n/a Wireless, NFC	
Noise Level	Operating: 52 dBA (Print) / 55 dBA (Copy) / 51 dBA (Scan)	
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Temperature: 10 to 32°C (50 to 90°F) / Altitude: 0 - 2896 metres	
Product Warranty	1-year Onsite Service + 3-years Parts Only guarantee (Maintenance Kit included)	
Size / Weight	H x W x D: 621 x 479 x 533 mm / 39 kg	
ENERGY STAR Typical Electricity Consumption	TEC: 0.55 kilowatt-hours per week	

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average yield based on approximately 5% print coverage. <sup>6</sup> Actual Yield may vary based on other factors such as device speed, paper size and feed orientation, toner coverage, tray source, percentage of black-only printing and average print job complexity. <sup>7</sup> Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>) (<http://www.openssl.org/>).